

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
18 March 2004 (18.03.2004)


PCT

(10) International Publication Number  
WO 2004/023088 A1

- (51) International Patent Classification<sup>7</sup>: G01M 3/28, F16L 55/134, 55/163, G01N 21/88
- (21) International Application Number: PCT/AU2003/001143
- (22) International Filing Date: 4 September 2003 (04.09.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 2002951189 4 September 2002 (04.09.2002) AU
- (71) Applicant and  
(72) Inventor: GILLAM, Terence, Dominic [AU/AU]; 4 Tenville Court, Deebing Heights, Queensland 4306 (AU).
- (74) Agent: INTELLEPRO; Patent & Trade Mark Attorneys, Level 7, 102 Adelaide Street, (GPO Box 1339, Brisbane, Qld, 4001), Brisbane, Queensland 4000 (AU).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report

[Continued on next page]

(54) Title: AN INFLATABLE PIPE TEST PROBE

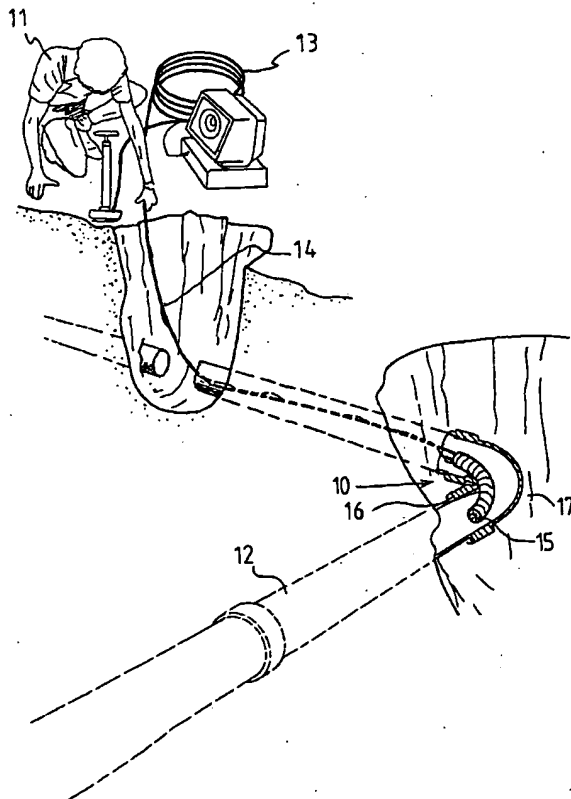

(57) Abstract: A probe (10) may be used to test or patch pipes where an operator (11) manually feeds the probe (10) along a pipe (12) by reason of an air tube (13) and CCTV cable (14). The operator may view via screen (16) the output from camera head (15) on the probe (10). The camera views the interior of a pipe in the direction of feed. The probe (10) has an elongate flexible body (16) so that it may deform to pass around corners in the pipe and be inflated to seal or apply patches.